



copy C

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Patentee: Satoru Toguchi *et al.*

Issued: June 22, 2004

Patent No.: 6,753,097 B2

-021 961,230

For: **ORGANIC ELECTROLUMINESCENT DEVICE**

Commissioner for Patents
P.O. Box 1450
Alexandria, VA 22313-1450

Certificate
AUG 27 2004
of Correction

**REQUEST FOR CERTIFICATE OF CORRECTION
UNDER 37 C.F.R. 1.322
OFFICE MISTAKE**

Sir:

Transmitted herewith in duplicate is PTO Form 1050 - Certificate of Correction for the above-identified U.S. Patent correcting the Office mistake as shown in the enclosed Certificate of Correction form.

The correction for the Office mistake is reflected in the attached copy of the Amendment filed January 14, 2004, with the U.S. Patent and Trademark Office.

Also enclosed is a copy of the Letters Patent, with the requested correction marked in red ink.

Since the above-mentioned matter was correctly shown in the Amendment, issuance of a Certificate of Correction is in order. Since this error was due to the Patent and Trademark Office, no fee is submitted herewith.

If any error is determined to be on part of the applicants, please charge all
necessary fees to attorney's deposit account no. 23-1951.

Respectfully submitted,



Hae-Chan Park
Reg. No. 50,114

Date: August 20, 2004

McGuireWoods LLP
1750 Tysons Boulevard, Suite 1800
McLean, VA 22102
(703) 712-5000

UNITED STATES PATENT AND TRADEMARK OFFICE
CERTIFICATE OF CORRECTION

PATENT NO.: 6,753,097 B2

DATED: June 22, 2004

INVENTOR: Satoru Toguchi *et al*

It is certified that errors appear in the above-identified patent and that said Letters Patent is hereby corrected as shown below.

Column 51,

Line 12, delete "R¹" and insert, --R⁸--.

MAILING ADDRESS OF SENDER:

McGuireWoods LLP
1750 Tysons Boulevard, Suite 1800
McLean, VA 22102
(703) 712-5000

PATENT NO.: 6,753,097 B2
No. of add'l copies
@ 50¢ per page



US006753097B2

(12) **United States Patent**
Toguchi et al.

(10) Patent No.: **US 6,753,097 B2**
(45) Date of Patent: **Jun. 22, 2004**

(54) **ORGANIC ELECTROLUMINESCENT DEVICE**

JP 8-245955 9/1996
JP 8-259935 10/1996
JP 8-286033 11/1996

(75) Inventors: Satoru Toguchi, Tokyo (JP); Atsushi Oda, Tokyo (JP); Hitoshi Ishikawa, Tokyo (JP)

(List continued on next page.)

(73) Assignee: Samsung SDI Co., Ltd., Suwon (KR)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 163 days.

(21) Appl. No.: **09/961,230**

(22) Filed: **Sep. 24, 2001**

(65) **Prior Publication Data**

US 2002/0028350 A1 Mar. 7, 2002

Related U.S. Application Data

(62) Division of application No. 09/186,081, filed on Nov. 5, 1998, now Pat. No. 6,329,083.

(30) **Foreign Application Priority Data**

Nov. 5, 1997 (JP)	9-303047
Nov. 5, 1997 (JP)	9-303048
Dec. 25, 1997 (JP)	9-357022
Jan. 6, 1998 (JP)	10-000886

(51) Int. Cl.⁷ **H05B 33/14**

(52) U.S. Cl. **428/690; 428/917; 313/504;**
..... **313/506**

(58) Field of Search **428/690, 917;**
..... **313/504, 506**


(56) **References Cited****U.S. PATENT DOCUMENTS**

5,141,671 A	8/1992	Bryan et al.	252/301.16
5,294,810 A *	3/1994	Egusa et al.	257/40
5,409,783 A	4/1995	Tang et al.	428/690
5,858,564 A *	1/1999	Tamura et al.	428/690
5,935,720 A	8/1999	Chen et al.	428/690
6,013,383 A *	1/2000	Shi et al.	428/690
6,329,084 B1 *	12/2001	Tamano et al.	428/690


FOREIGN PATENT DOCUMENTS

JP 3-791	1/1991
JP 3-152897	6/1991
JP 3-200289	9/1991
JP 4-6795	1/1992
JP 4-334894	11/1992
JP 5-295359	11/1993
JP 6-132080	5/1994
JP 7-53955	2/1995
JP 7-138561	5/1995
JP 7-272854	10/1995
JP 7-288184	10/1995
JP 8-20771	1/1996
JP 8-40995	2/1996
JP 8-40997	2/1996
JP 8-53397	2/1996
JP 8-87122	4/1996
JP 8-199162	8/1996
JP 8-239655	9/1996


An electroluminescence device includes an anode, a cathode and at least one organic layer sandwiched between the anode and the cathode, the organic layer including at least a light emitting layer which includes at least one of compound C1, compound C2 and compound C4, alone or in combination:



C1



C2

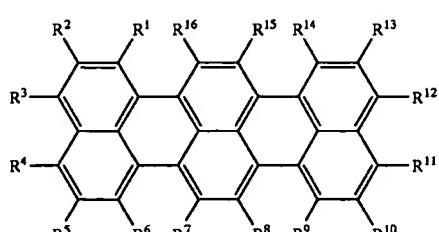

C4

17 Claims, 1 Drawing Sheet

51

tuted or unsubstituted amino group, a nitro group, a cyano group, a substituted or unsubstituted alkyl group, a substituted or unsubstituted alkenyl group, substituted or unsubstituted cycloalkyl group, a substituted or unsubstituted aromatic hydrocarbon group, a substituted or unsubstituted aromatic heterocyclic group, substituted or unsubstituted aralkyl group, a substituted or unsubstituted aryloxy group, a substituted or unsubstituted alkoxy carbonyl group, or a carboxyl group, and

wherein any two of R¹ to R⁷ may form a ring, and any two of R⁸ to R¹⁴ may form a ring.

2. The organic electroluminescent device as set forth in claim 1, wherein said organic layer includes a hole transporting layer containing said compound represented with said chemical formula C2, alone or in combination.

3. The organic electroluminescent device as set forth in claim 1, wherein said organic layer includes an electron transporting layer containing said compound represented with said chemical formula C2, alone or in combination.

4. The organic electroluminescent device as set forth in claim 1, wherein said organic layer includes both a hole transporting layer and an electron transporting layer, said electron transporting layer containing said compound represented with said chemical formula C2, alone or in combination.

5. The organic electroluminescent device as set forth in claim 1, wherein said anode has a work function equal to or greater than 4.5 eV.

6. The organic electroluminescent device as set forth in claim 5, wherein said cathode has a smaller work function than that of said anode.


7. The organic electroluminescent device as set forth in claim 1, wherein said organic layer has a thickness in the range of 1 nanometer to 1 micrometer both inclusive.

8. An electroluminescent device comprising:

an anode;

a cathode; and

at least one organic layer sandwiched between said anode and said cathode, said organic layer including at least a light emitting layer which comprises a terylene compound represented with the chemical formula C4, alone or in combination:

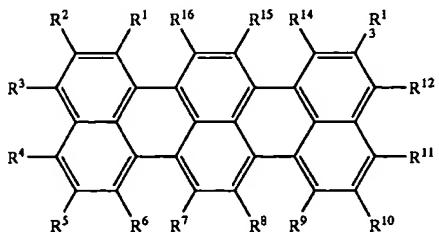

C4

35

52

wherein R¹ to R¹⁶ each independently represents a hydrogen atom, a halogen atom, a hydroxyl group, a substituted or unsubstituted amino group, a nitro group, a cyano group, a substituted or unsubstituted alkyl group, a substituted or unsubstituted alkenyl group, a substituted or unsubstituted cycloalkyl group, a substituted or unsubstituted aromatic hydrocarbon group, a substituted or unsubstituted aromatic heterocyclic group, substituted or unsubstituted aralkyl group, a substituted or unsubstituted aryloxy group, a substituted or unsubstituted alkoxy carbonyl group, or a carboxyl group, and

wherein any two of R¹ to R¹⁶ may form a ring, and wherein at least one of R¹ to R¹⁴ is a di-aryl amino group represented with —NAr¹Ar² where each of Ar¹ and Ar² independently indicates an aryl group having a carbon number of 6 to 20 both inclusive.

9. The organic electroluminescent device as set forth in claim 8, wherein said organic layer includes a hole transporting layer containing said terylene compound represented with said chemical formula C4, alone or in combination.

10. The organic electroluminescent device as set forth in claim 8, wherein said organic layer includes an electron transporting layer containing said terylene compound represented with said chemical formula C4, alone or in combination.

11. The organic electroluminescent device as set forth in claim 8, wherein said light-emitting layer comprises a red light-emitting layer.

12. The organic electroluminescent device as set forth in claim 8, wherein each of said aryl groups Ar¹ and Ar² has a substituent.

13. The organic electroluminescent device as set forth in claim 8, wherein at least one of said Ar¹ and Ar² includes a substituted or unsubstituted styryl group as a substituent.

14. The organic electroluminescent device as set forth in claim 13, wherein each of said aryl groups Ar¹ and Ar² has a substituent.

15. The organic electroluminescent device as set forth in claim 8, wherein said anode has a work function equal to or greater than 4.5 eV.

16. The organic electroluminescent device as set forth in claim 15, wherein said cathode has a smaller work function than that of said anode.

17. The organic electroluminescent device as set forth in claim 8, wherein said organic layer has a thickness in the range of 1 nanometer to 1 micrometer both inclusive.

* * * * *

45

50

55



IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Application of

Satoru Toguchi, et al.

Serial No.: 09/961,230

Group Art Unit: 1774

Filed: September 24, 2001 Examiner: Yamnitzky, Marie Rose

For: ORGANIC ELECTROLUMINESCENT DEVICE

Honorable Commissioner of Patents
Alexandria, VA 22313-1450
Box AF

AMENDMENT UNDER 37 C.F.R. §1.116

Sir:

In response to the Office Action dated October 14, 2003, please amend the above-identified application as follows:

AMENDMENTS TO THE CLAIMS:

Please cancel claims 1-6 and 34 without prejudice or disclaimer.


Claims 1-6 (Canceled)

Crossed out
Claim 7. (Presently presented) A electroluminescent device comprising:

an anode;

a cathode; and

at least one organic layer sandwiched between said anode and said cathode, said organic layer including at least a light emitting layer which comprises a bisanthrene compound represented with the chemical formula C2, alone or in combination:

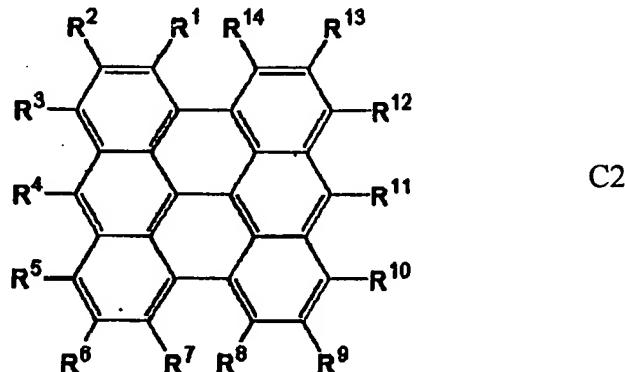

wherein R¹ to R¹⁴ each independently represents a hydrogen atom, a halogen atom, a hydroxyl group, a substituted or unsubstituted amino group, a nitro group, a cyano group, a substituted or unsubstituted alkyl group, a substituted or unsubstituted alkenyl group, a substituted or unsubstituted cycloalkyl group, a substituted or unsubstituted alkoxy group, a substituted or unsubstituted aromatic hydrocarbon group, a substituted or unsubstituted aromatic heterocyclic group, substituted or unsubstituted aralkyl group, a substituted or unsubstituted aryloxy group, a substituted or unsubstituted alkoxycarbonyl group, or a carboxyl group, and

wherein any two of R¹ to R⁷ may form a ring, and any two of R⁸ to R¹⁴ may form a ring.

Serial No. 09/961,230
Docket No. A081-A

The Commissioner is hereby authorized to charge any deficiency in fees or to credit any overpayment in fees to Attorney's Deposit Account No. 50-0481.

Respectfully Submitted,

Date: 1/14/04




Phillip E. Miller
Registration No. 46,060

McGinn & Gibb, PLLC
8321 Old Courthouse Road, Suite 200
Vienna, VA 22182-3817
(703) 761-4100
Customer No. 21254

CERTIFICATE OF FACSIMILE TRANSMISSION

I hereby certify that the foregoing Amendment was filed by facsimile with the United States Patent and Trademark Office, Examiner Marie Yamnitzky, Group Art Unit # 1774 at fax number (703) 872-9306 this 14th day of January, 2004.



Phillip E. Miller
Reg. No. 46,060